



6912 Fibers in 48U




XTREME DENSITY (XD)

HIGH DENSITY FIBER DEPLOYMENTS MADE EASY

Perfect for Hyperscale Data Center Access

Modular Configurable Solution Available in 2U/4U/6U

FOR DESIGN HELP, EMAIL INQUIRY@OPTICONX.COM OR CALL 888.748.6855

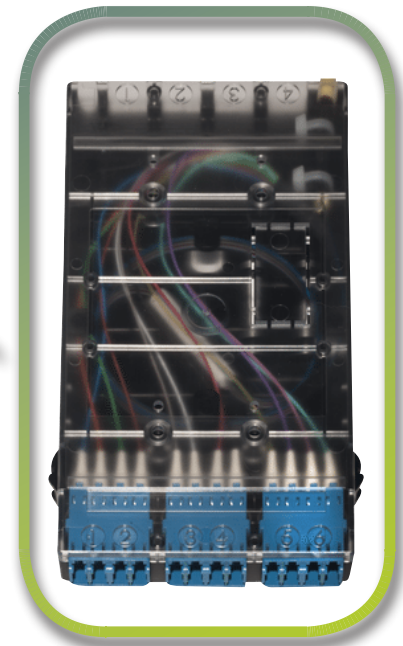

The foundation of XD is the Xtreme+ Cassette

XD is a pre-terminated solution panel from Opticonx, the worldwide leader in data center fiber cabling. XD provides the highest density in the industry. XD can be configured with different connector types, cable types and any pigtail length for a custom solution for your data center, SAN/LAN or central office.

Opticonx XD High Density Ready-to-Splice Fiber Panel is a 2, 4 or 6U fiber panel loaded with LC pigtails loaded into Xtreme+ cassettes routed to splice trays. The 6U panel features 3 slide-out shelves, each of which house 288 fibers in Xtreme+ cassettes to manage, protect and store individual fibers which are broken out into 250um or 200um ribbon fiber.

Xtreme+

The ribbon fanouts are housed within the Xtreme+ series fiber cassettes. The cassettes feature built in cable management which eliminates the need to manage 900um fibers within the patch panel. The cassettes are removable for maintenance and service, and aid in fiber identification.


Dust-shuttered, VFL compatible LC adapters eliminate the need for dust caps and make fiber identification by visible laser source easy.

Slide out Shelves

The XD Series features slide out shelves that make accessing the fiber jumpers and splice trays easy. Each shelf houses 288 fibers and its own splice trays. The shelves have positive stops for jumper management, cassette access and splice tray access.

ORDERING INFORMATION*		
Part Number	Panel Size	Duplex Ports
RTS288LCU-250	2RU	288
RTS576LCU-250	4RU	576
RTS864LCU-250	6RU	864

* Other standard and custom configurations are available

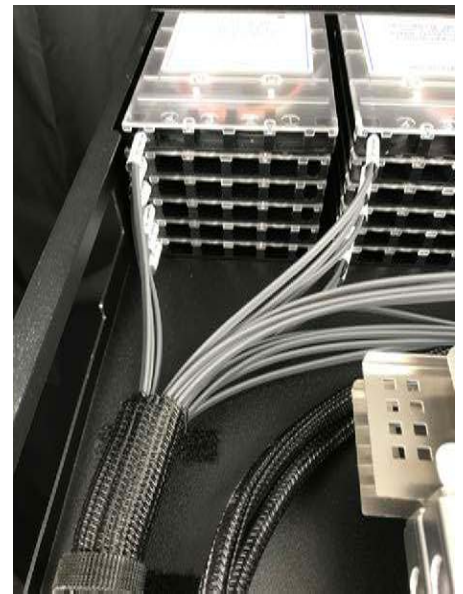

PHYSICAL SPECIFICATIONS

Panel	Height	Width	Depth	Weight
2RU	3.5"	17.125" (without brackets)	22"	28 lbs
4RU	7.5"	17.125" (without brackets)	22"	56 lbs
6RU	10.5"	17.125" (without brackets)	22"	85 lbs



OPTICAL SPECIFICATIONS

Insertion loss singlemode	<- .35dB UPC
Reflectance singlemode	<- .55dB UPC, <- .65dB APC



Why should you buy from Opticonx?

- Opticonx manufactures a world class product with industry best lead times
- All products are proudly made in the USA
- Opticonx solutions meet and exceed our client's expectations
- Front and back access
- Scalable and modular solutions
- Supports LC and MTP/MPO applications



FOR DESIGN HELP, EMAIL INQUIRY@OPTICONX.COM OR CALL 888.748.6855