




Fiber Optic Cable

Riser Rated

2mm Simplex Cable

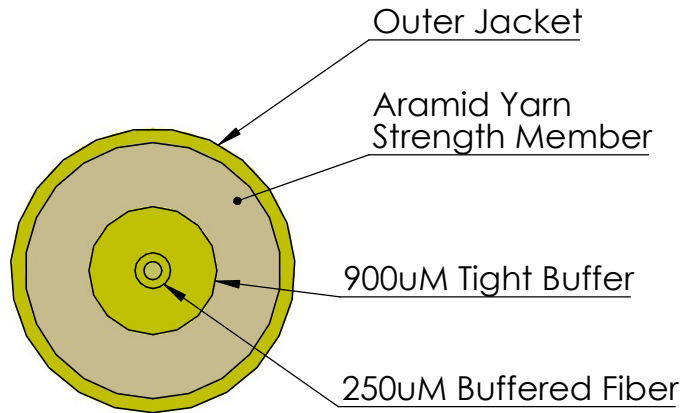

Part Number:
1630XX-001

Substitute XX for:
12- OM1
21- OM2
27- OM3
28- OM4
33- SM

Mechanical:

Diameter: 0.079" (2.0mm)

Tensile Load:

30 lbs (134N) Max. - Installation

11 lbs (49N) Max. - Operating

Minimum Bend Radius:

1.6" (4.06cm) Installation

0.80" (2.03cm) In Service

Cable Weight: 1.9 lbs/1000ft (6.23kg/km)

Operating Temperature: -4F to 167F (-20C to 75C)

Storage Temperature: -40F to 167F (-40C to 75C)

Certification: (UL) Type OFNR per the National Electric Code. (ANSI/NFPA 70-1999) Section 770-53(b)
For use in Vertical Riser Shafts

Print: "Opticonx Inc 888-748-6855 Optical Fiber Cable (UL) OFNR E220890 c(UL) OFN-FT4
1 FIBER (fiber type) P/N - 1610XX-001 (dd/mm/yy)" plus sequential meter or footage marks
or custom print

Proprietary and Confidential

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF OPTICONX, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF OPTICONX IS PROHIBITED.

www.opticonx.com

Drawn By: PCS
Approved By: PL
Date: 10/2/2001
Rev:1

