





Fiber Optic Cable
Duplex Zipcord
 2.0mm x 4.3mm Riser Rated Zipcord Fiber Cable

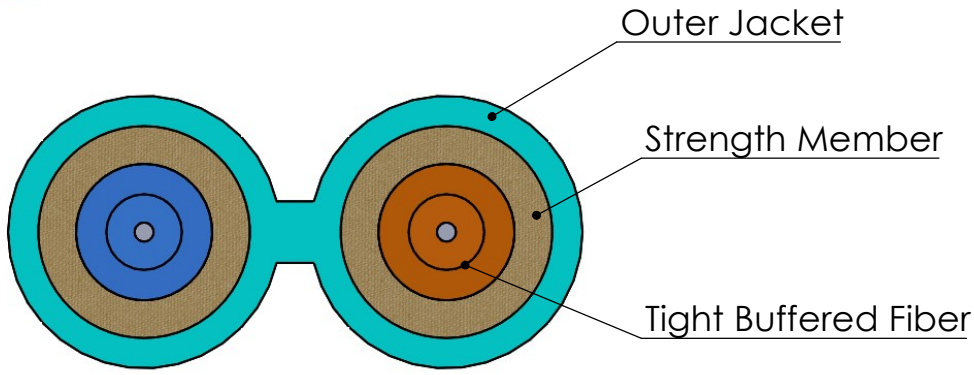

Part Number
1630XX-002

Jacket Color:
 OM1-ORANGE
 OM2-ORANGE
 OM3-AQUA
 OM4-AQUA
 SM-YELLOW

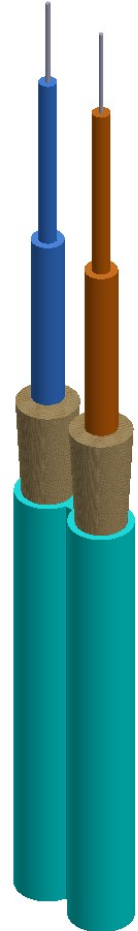

Mechanical:

Diameter:
 0.079 minor x 0.168 major (2.0mm x 4.3mm)
Tensile Load:
 Installation: 150lbs (668N) Max.
 Operating: 74lbs (330N) Max.
Minimum Bend Radius:
 Installation: 1.6" (4.06cm)
 Operating: 0.80" (2.03cm)
Cable Weight: 4.5lbs./1000ft (6.7kg/km)
Operating Temperature: -4F to 167F (-20C to 75C)
Storage Temperature: -40F to 167F (-40C to 75C)

Construction:

Component
 Fiber: 245uM Diameter Buffer
 Buffer: 900uM Diameter Thermoplastic Tight Buffer
 Buffer Color: Blue/Orange
Jacket Material:
 Flame Retardant PVC
Jacket Color:
 Standard: Orange (OM1, OM2), Aqua (OM3, OM4),
 Yellow (SM)
 Optional:
 Blue, Orange, Green, Brown, Slate, White
 Red, Black, Yellow, Violet, Pink, Aqua
Strength Member: Dielectric Aramid Yarn Fibers

Certification: (UL) Type OFNR per the National Electric Code. (ANSI/NFPA 70-1999) Section 770-53(b). For use in Vertical Riser Shafts
 *Meets FDDI ANSI X3T9.5, IBM 3044 Channel Extender.

Print: "Opticonx Inc. 888-748-6855 www.opticonx.com Optical Fiber Cable (UL) c(UL) Type OFNR 2 fiber (fiber type) P/N-1630xx-002 dd/mm/yy, Seq. Marks"

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Opticonx, Inc.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Opticonx, Inc. IS PROHIBITED.

(fiber type denotes core diameter 62.5/125, 50/125, 8.2/125)
 (dd/mm/yy denotes day, month, and year of manufacture)
 custom print available with minimum order quantity

www.opticonx.com

Drawn By: PCS
 Approved By: PL
 Date: 10/23/15
 Rev: B