




# Fiber Optic Cable

## Duplex Zipcord

2.0mm x 4.3mm Plenum Rated Zipcord Fiber Cable

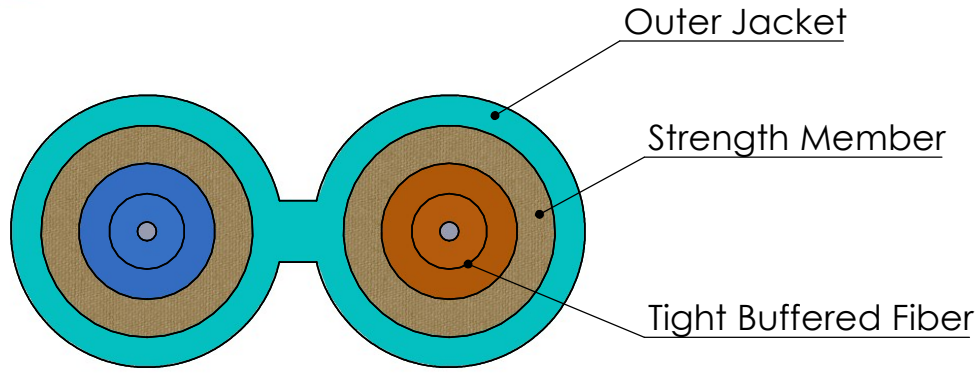

**Part Number**  
**1930XX-002**

Jacket Color:  
OM1-ORANGE  
OM2-ORANGE  
OM3-AQUA  
OM4-AQUA  
SM-YELLOW

### Mechanical:

**Diameter:**

0.079 minor x 0.168 major (2.0mm x 4.3mm)

**Tensile Load:**

Installation: 60lbs (267N) Max.  
Operating: 15lbs (67N) Max.

**Minimum Bend Radius:**

Installation: 2.0" (5.0cm)  
Operating: 1.2" (3.0cm)

**Cable Weight:** 4.0lbs./1000ft (6.0kg/km)

**Operating Temperature:** -4F to 176F (-20C to 80C)

**Storage Temperature:** -40F to 176F (-40C to 80C)

### Construction:

**Component**

Fiber: 245uM Diameter Buffer  
Buffer: 900uM Diameter Thermoplastic Tight Buffer  
Buffer Color: Blue/Orange

**Jacket Material:**

Flame Retardant PVC


**Jacket Color:**

Standard: Orange (OM1, OM2), Aqua (OM3, OM4), Yellow (SM)

Optional:

Blue, Orange, Green, Brown, Slate, White  
Red, Black, Yellow, Violet, Pink, Aqua

**Strength Member:** Dielectric Aramid Yarn Fibers

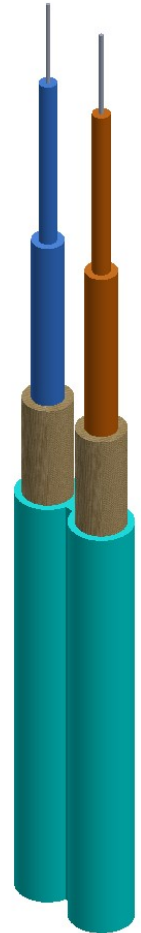

Certification: (UL) Type OFNP per the National Electric Code. (ANSI/NFPA 70-1999) Section 770-53(a). For use in Air Return Plenums Transporting Environmental Air.

\*Meets FDDI ANSI X3T9.5, IBM 3044 Channel Extender.

Print: "Opticonx Inc. 888-748-6855 www.opticonx.com Optical Fiber Cable (UL) c(UL) Type OFNP 2 fiber (fiber type) P/N-1930xx-002 dd/mm/yy, Seq. Marks"

(fiber type denotes core diameter 62.5/125, 50/125, 8.2/125)

(dd/mm/yy denotes day, month, and year of manufacture)

custom print available with minimum order quantity

[www.opticonx.com](http://www.opticonx.com)

Drawn By: PCS  
Approved By: PL  
Date: 10/23/15  
Rev: B

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Opticonx, Inc.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Opticonx, Inc. IS PROHIBITED.