




Fiber Optic Cable
Duplex Zipcord
 2.9mm x 6mm Plenum Rated Zipcord Fiber Cable

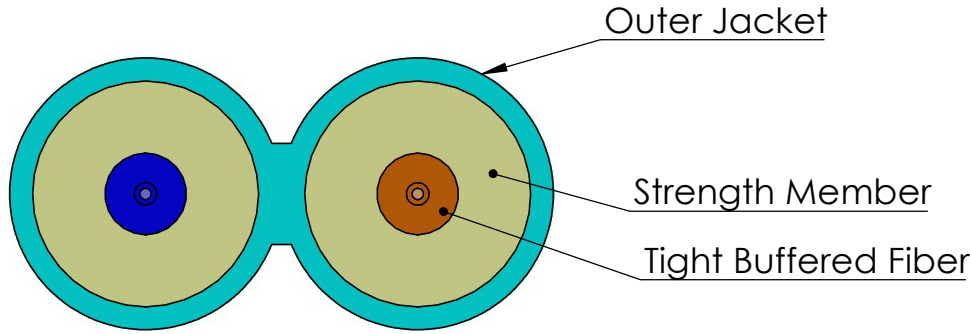

Part Number
1970XX-002

Jacket Color:
 OM1-ORANGE
 OM2-ORANGE
 OM3-AQUA
 OM4-AQUA
 SM-YELLOW

Mechanical:

Diameter:
 0.114 minor x 0.235 major (2.9mm x 6.0mm)

Tensile Load:
 Installation: 220lbs (980N) Max.
 Operating: 130lbs (579N) Max.

Minimum Bend Radius:
 Installation: 2.28" (58cm)
 Operating: 1.14" (36.6cm)

Cable Weight: 10.5lbs./1000ft (15.65kg/km)

Operating Temperature: -4F to 176F (-20C to 80C)

Storage Temperature: -40F to 176F (-40C to 80C)

Construction:

Component
 Fiber: 245uM Diameter Buffer
 Buffer: 900uM Diameter Thermoplastic Tight Buffer
 Buffer Color: Blue/Orange

Jacket Material:
 Flame Retardant PVC

Jacket Color:
 Standard: Orange (OM1, OM2), Aqua (OM3, OM4),
 Yellow (SM)
 Optional:
 Blue, Orange, Green, Brown, Slate, White
 Red, Black, Yellow, Violet, Pink, Aqua

Strength Member: Dielectric Aramid Yarn Fibers



Certification: (UL) Type OFNP per the National Electric Code. (ANSI/NFPA 70-1999) Section 770-53(a). For use in Air Return Plenums Transporting Environmental Air.
 *Meets FDDI ANSI X3T9.5, IBM 3044 Channel Extender.

Print: "Opticonx Inc. 888-748-6855 www.opticonx.com Optical Fiber Cable (UL) c(UL) Type OFNP 2 fiber (fiber type) P/N-1970XX-002 dd/mm/yy, Seq. Marks"

(fiber type denotes core diameter 62.5/125, 50/125, 8.2/125)
 (dd/mm/yy denotes day, month, and year of manufacture)
 custom print available with minimum order quantity

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Opticonx, Inc.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Opticonx, Inc. IS PROHIBITED.

www.opticonx.com

Drawn By: PCS
 Approved By: PL
 Date: 10/23/15
 Rev: B