




Fiber Optic Cable
Furcation Tubing
 2mm Zipcord Furcation Tubing for 250uM Fiber

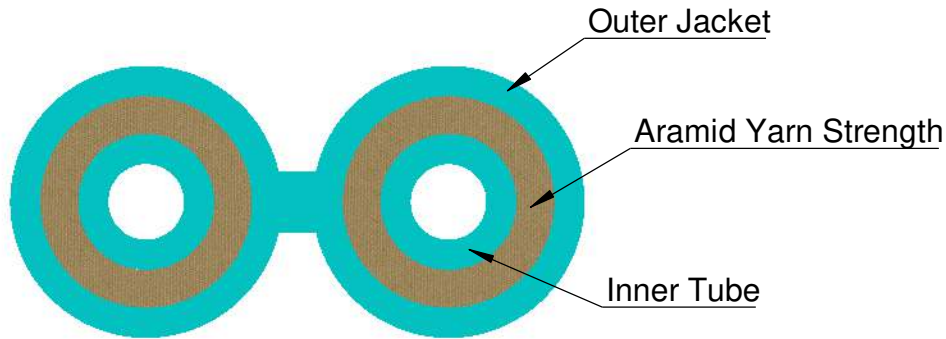

Part Number
7010ZP-XXX

- Replace XXX with:
- BLU - BLUE
 - ORG - ORANGE
 - GRN - GREEN
 - BRN - BROWN
 - GRY - GREY
 - WHT - WHITE
 - RED - RED
 - BLK - BLACK
 - YEL - YELLOW
 - VIO - VIOLET
 - PNK - PINK
 - AQU - AQUA



Mechanical:

Diameter:

Outer Tube: 0.070" minor x 0.157" major
 (1.8mm x 4.0mm) +/- 0.003" (0.08mm)
 Inner Tube: 0.020" x 0.035" (500uM x 900uM)
 +/- 0.002"/0.05mm

Tensile Load:

Installation: 60lbs (267N) Max.
 Operating: 15lbs (67N) Max.

Minimum Bend Radius:

Installation: 1.14" (5.8cm)
 Operating: 0.70" (2.9cm)

Cable Weight: 3.5lbs./1000ft (5.2kg/km)

Operating Temperature: -20F to 167F (-4C to 75C)

Storage Temperature: -20F to 167F (-4C to 75C)

Construction:

Jacket Material:

Flame Retardant PVC

Inner Tube: Hytrel

Jacket Color Options:

Blue, Orange, Green, Brown, Slate, White
 Red, Black, Yellow, Violet, Pink, Aqua

Inner Tube Color: to match Outer Tube

Strength Member: Dielectric Aramid Yarn Fibers

Applications Note:

This tubing is designed to upjacket (2) 250um fibers
 to 2mm zipcord for direct termination.

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 Opticonx, Inc.. ANY
 REPRODUCTION IN PART OR AS A WHOLE
 WITHOUT THE WRITTEN PERMISSION OF
 Opticonx, Inc. IS
 PROHIBITED.

www.opticonx.com

Drawn By: PCS
 Approved By: PL
 Date: 10/10/14
 Rev: A