





Fiber Optic Furcation Tubing

2.9mm Round Duplex Breakout Tubing

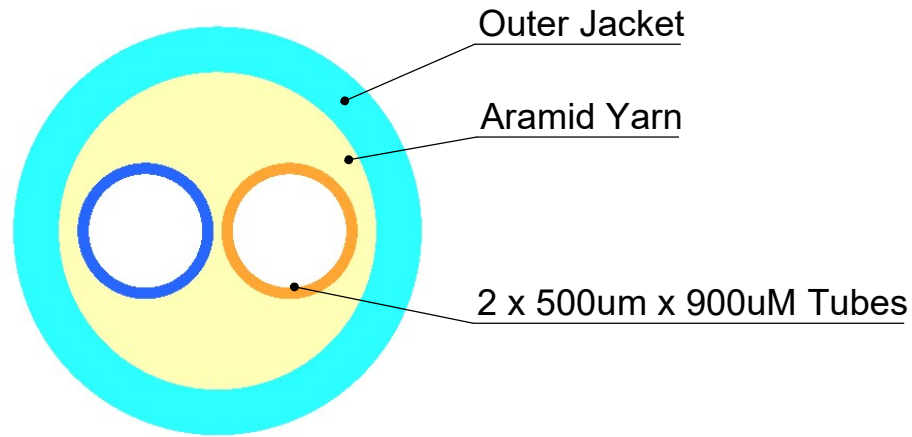

707DUP-XXX

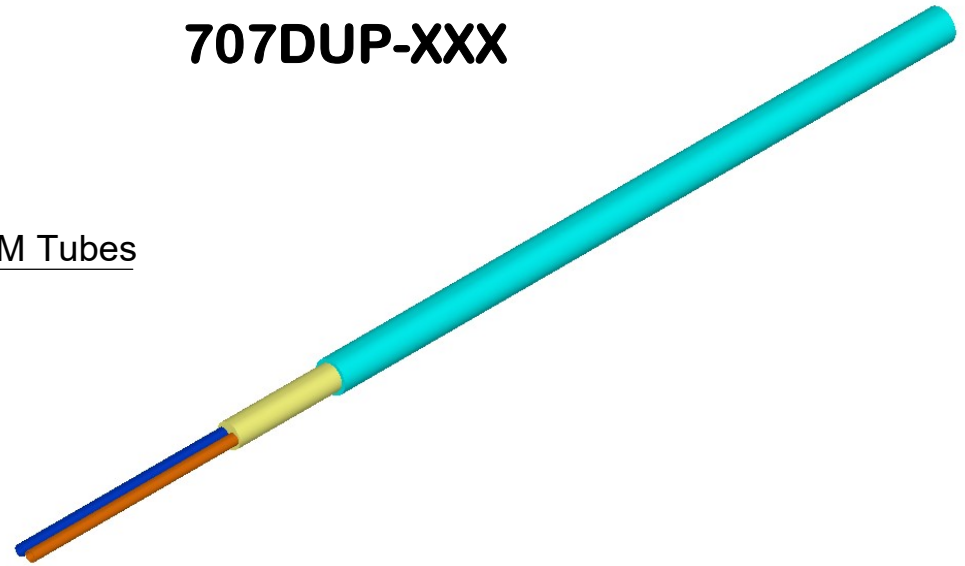

Mechanical:

Diameter: 0.114" (2.9mm)

Tensile Load:

50 lbs (223N) Max.-Installation

15 lbs (67N) Max.-In Service

Minimum Bend Radius:

2.28" (5.8cm)-Installation

1.14" (2.9cm)-In Service

Cable Weight: 4.2lbs/1000ft. (6.3kg/km)

Operating Temperature: -4F to 167F (-20C to 75C)

Storage Temperature: -40F to 167F (-40C to 75C)

Component

Two Tubes @ 0.020" x 0.035" (0.5mm x 0.9mm)

Polymer Tubing

Tubing Color: Natural, Transparent

Strength Members

Dielectric Aramid Yarn Fibers

Jacket Color:

Blue, Orange, Green, Brown, Gray, White,
Red, Black, Yellow, Violet, Pink, Aqua

Jacket:

Flame Retardant PVC

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Opticonx, Inc. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Opticonx, Inc. IS PROHIBITED.

Applications Note:

This fiber cable is designed for use with 3mm uniboot type connectors.

www.opticonx.com

Drawn By: PCS
Approved By: PL
Date: 04/28/20
Rev: A