




**Fiber Optic Cable**  
**Furcation Tubing**  
 2mm Low Smoke Zero Halogen Zipcord Furcation Tubing

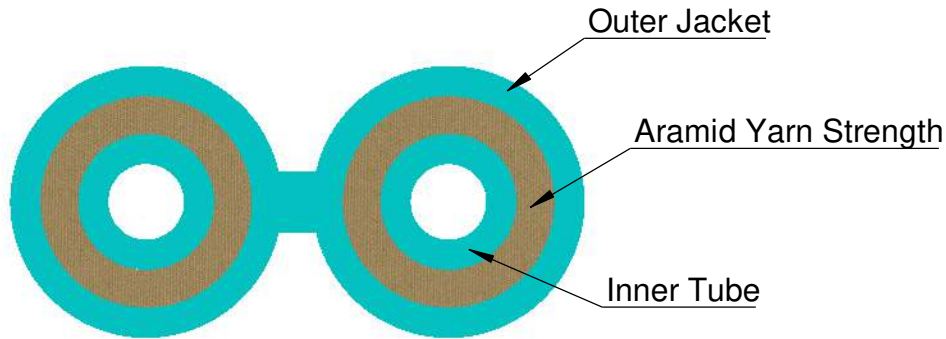

**Part Number**  
**7310ZP-XXX**

- Replace XXX with:
- BLU - BLUE
  - ORG - ORANGE
  - GRN - GREEN
  - BRN - BROWN
  - GRY - GREY
  - WHT - WHITE
  - RED - RED
  - BLK - BLACK
  - YEL - YELLOW
  - VIO - VIOLET
  - PNK - PINK
  - AQU - AQUA



**Mechanical:**

**Diameter:**

Outer Tube: 0.070" minor x 0.157" major  
 (1.8mm x 4.0mm) +/- 0.003" (0.08mm)  
 Inner Tube: 0.020" x 0.035" (500uM x 900uM)  
 +/- 0.002"/0.05mm

**Tensile Load:**

Installation: 60lbs (267N) Max.  
 Operating: 15lbs (67N) Max.

**Minimum Bend Radius:**

Installation: 1.14" (5.8cm)  
 Operating: 0.70" (2.9cm)

**Cable Weight:** 3.5lbs./1000ft (5.2kg/km)

**Operating Temperature:** -20F to 167F (-4C to 75C)

**Storage Temperature:** -20F to 167F (-4C to 75C)

**Construction:**

**Jacket Material:**

Flame Retardant Non Halogen Thermoplastic  
 Inner Tube: Hytrel

**Jacket Color Options:**

Blue, Orange, Green, Brown, Slate, White  
 Red, Black, Yellow, Violet, Pink, Aqua

**Inner Tube Color:** to match Outer Tube

**Strength Member:** Dielectric Aramid Yarn Fibers

**Applications Note:**

Furcation tubing for upjacketing 2 250uM Fibers to 1 2mm Duplex Zipcord for direct termination.

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Opticonx, Inc.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Opticonx, Inc. IS PROHIBITED.

[www.opticonx.com](http://www.opticonx.com)

Drawn By: PCS  
 Approved By: PL  
 Date: 10/10/14  
 Rev: A