




Fiber Optic Cable

Furcation Tubing

Low Smoke Zero Halogen 3mm Furcation Tubing (for 250uM Fiber)

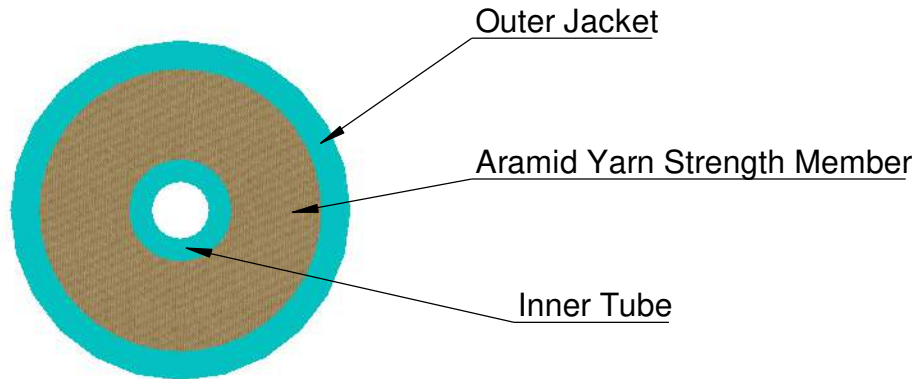

Part Number:

707000-035XXX

Replace XXX with:

- BLU - BLUE
- ORG - ORANGE
- GRN - GREEN
- BRN - BROWN
- GRY - GREY
- WHT - WHITE
- RED - RED
- BLK - BLACK
- YEL - YELLOW
- VIO - VIOLET
- PNK - PINK
- AQU - AQUA



Mechanical

Diameter: 0.114" (2.9mm)

Tensile Load:

Installation: 110 lbs (490N) Max.

Operating: 65 lbs (290N) Max

Minimum Bend Radius:

Installation: 2.28" (5.8cm)

Operating: 1.14" (2.9cm)

Cable Weight: 4.2 lbs/1000ft (6.3kg/km)

Operating Temperature: -4F to 167F (-20C to 75C)

Storage Temperature: -40F to 167F (-40C to 75C)

Construction:

Inner Tube:

Diameter: 0.020" x 0.035" (.5mm x .9mm) +/- 0.002" (0.05mm)

Tubing Color: to match outer jacket

Strength Member:

Dielectric Aramid Yarn Fibers

Outer Jacket:

Jacket Color: blue, orange, green, brown, slate, white
red, black, yellow, violet, pink, aqua

Material: Flame Retardant Non Halogen Thermoplastic

Applications Note:

This tubing is designed for upjacketing 250um fiber to 3mm for direct termination.

Drawn By: PS
Approved By: PL
Date: 10/15/14
Rev: A

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Opticonx, Inc. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Opticonx, Inc. IS PROHIBITED.