




# Fiber Optic Cable

## Furcation Tubing

3mm Low Smoke Zero Halogen Zipcord Furcation Tubing (for 250um Fiber)

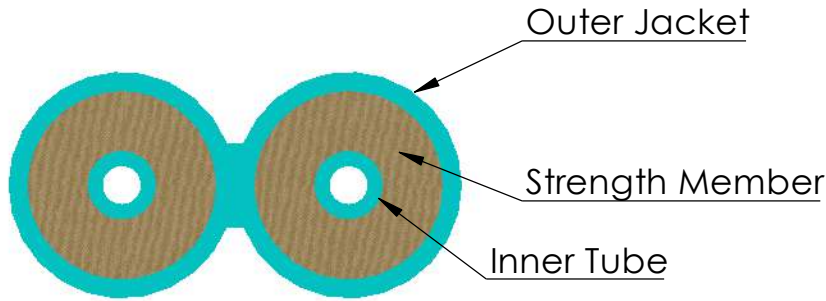

### Part Number

**7370ZP-XXX**

Replace XXX with:

- BLU - BLUE
- ORG - ORANGE
- GRN - GREEN
- BRN - BROWN
- GRY - GREY
- WHT - WHITE
- RED - RED
- BLK - BLACK
- YEL - YELLOW
- VIO - VIOLET
- PNK - PINK
- AQU - AQUA



### Mechanical:

#### Diameter:

Outer Tube: 0.114" minor x 0.235" major  
(2.9mm x 6.0mm)

Inner Tube: 0.020" x 0.035" (500uM x 900uM)

#### Tensile Load:

Installation: 220lbs (980N) Max.

Operating: 130lbs (579N) Max.

#### Minimum Bend Radius:

Installation: 2.28" (5.8cm)

Operating: 1.14" (2.9cm)

**Cable Weight:** 8.2lbs./1000ft (12kg/km)

**Operating Temperature:** -4F to 167F (-20C to 75C)

**Storage Temperature:** -4F to 167F (-20C to 75C)

### Construction:

#### Jacket Material:

Flame Retardant Low Smoke Non Halogen Thermoplastic

Inner Tube: Hytel

#### Jacket Color Options:

Blue, Orange, Green, Brown, Slate, White

Red, Black, Yellow, Violet, Pink, Aqua

**Inner Tube Color:** to match Outer Tube

**Strength Member:** Dielectric Aramid Yarn Fibers

#### Applications Note:

Furcation tubing for upjacketing 2 250uM Fibers to 1 3mm Duplex Zipcord for direct termination.

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Opticonx, Inc.. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Opticonx, Inc. IS PROHIBITED.

[www.opticonx.com](http://www.opticonx.com)

Drawn By: PCS  
 Approved By: PL  
 Date: 10/14/14  
 Rev: A