




**Fiber Optic Cable**  
**Furcation Tubing**  
**1.2mm Breakout Tubing**

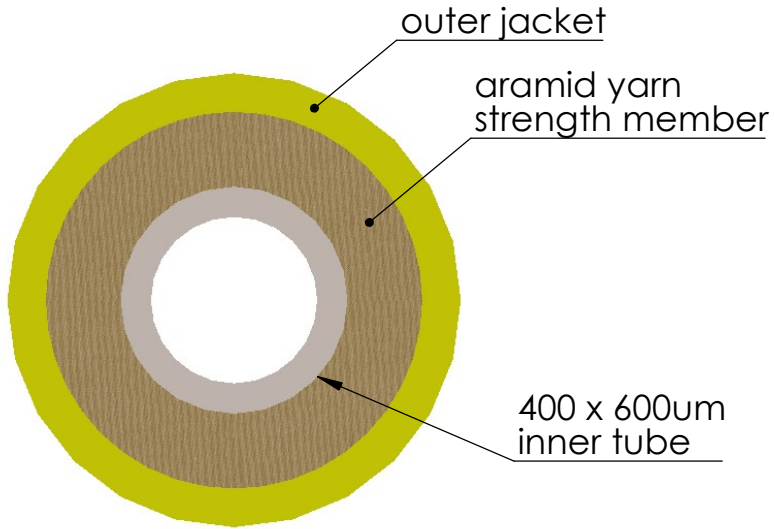

**Part Number:**

**B12506040XX**

Replace XX with:

- BL - BLUE
- OR - ORANGE
- GR - GREEN
- BR - BROWN
- SL - GREY
- WH - WHITE
- RD - RED
- BK - BLACK
- YE - YELLOW
- VI - VIOLET
- PK - PINK
- AQ - AQUA

Old Part Number: C200151-1.2XXX



**Mechanical**

**Diameter:** 0.047" (1.2mm) +/- 0.003" (0.08mm)

**Tensile Load:**

Installation: 10 lbs (44N) Max.

Operating: 3 lbs (13N) Max

**Minimum Bend Radius:**

Installation: 1.58" (4.01cm)

Operating: 0.79" (2.0cm)

**Cable Weight:** 0.5 lbs/1000ft (0.75kg/km)

**Operating Temperature:** -4F to 167F (-20C to 75C)

**Storage Temperature:** -40F to 167F (-40C to 75C)

**Construction:**

**Inner Tube:**

Diameter: 0.016" x 0.024" (0.4mm x 0.6mm) Polypropylene

Tubing +/- 0.002" (0.05mm)

Tubing Color: Natural

**Strength Member:**

Dielectric Aramid Yarn Fibers

**Outer Jacket:**

Jacket Color: blue, orange, green, brown, slate, white  
 red, black, yellow, violet, pink, aqua

Material: Flame Retardant PVC

**PROPRIETARY AND CONFIDENTIAL**

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Opticonx, Inc. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Opticonx, Inc. IS PROHIBITED.