


900μM Furcation Tubing for 250μM Fiber

Opticonx LightTube™ 900μM furcation tubing is a simplex tube designed for the protection, termination and identification of 250μM buffered fiber.



Product Features:

- ◆ 18 Colors Available
- ◆ Smooth fiber insertion
- ◆ Low shrinkage
- ◆ RoHS & REACH compliant
- ◆ Custom print legends and striping available
- ◆ Pull string available
- ◆ Custom constructions available

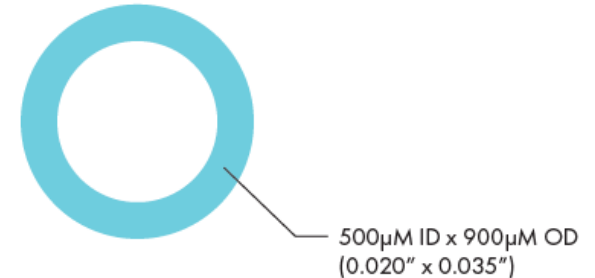

Ordering Information:

Part Number	Legacy Part Number	Material	Tube OD x ID mm	Operating Temp	Shrinkage @ 85° C	Min Bend Radius		Weight
						Install	Service	
F09050XX	784000-035XXX	Polypropylene	900X500μm	-40C to +85C	<2%	5cm	3cm	.52kg/km
F09150XX	712000-035XXX	PVDF	900X500μm	-40C to +125C	<2%	5cm	3cm	.52kg/km
F09250XX	722000-035XXX	TPE (Hytrel®)	900X500μm	-40C to +85C	<2%	5cm	3cm	.52kg/km
F09350XX	782000-035XXX	LD Polyethylene	900X500μm	-40C to +85C	<2%	5cm	3cm	.52kg/km
F09450XX	N/A	Nylon	900X500μm	-25C to +75C	<2%	5cm	3cm	.52kg/km
F09260XX	722000-600	TPE (Hytrel®)	900X600μm	-40C to +120C	<2%	5cm	3cm	.52kg/km

Replace 'XX' with Color Code

BL = Blue	BR = Brown	RD = Red	VI = Violet	NA = Natural	MG = Magenta
OR = Orange	SL = Slate (Gray)	BK = Black	PK = Pink	LM = Lime	TN = Tan
GR = Green	WH = White	YL = Yellow	AQ = Aqua	OL = Olive	EV = Erika Violet

